

耐低温橡胶线

Product Name: Low-temperature silicone rubber wire

Standard: Enterprise Standard

Rating: $-60^{\circ}\text{C}-105^{\circ}\text{C}$, 600V


标准长度 (m): 100

Application: Internal wiring for automotive equipment & electronic equipment that require low temperature performance

Optional items

3. Further processing is available
4. Documents: OQC Report, Product specification report

Construction & Properties

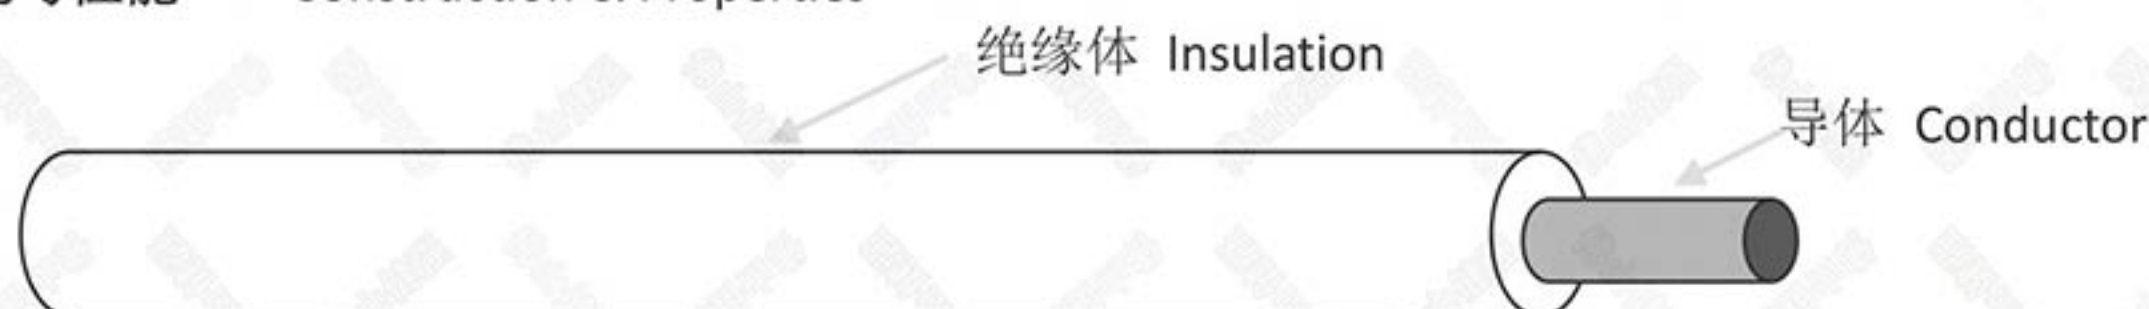

表面标识: N/A

导体 Conductor					绝缘体 Insulation	
种类 (Type)	标称截面 Nom.Area (mm)	结构 Composition (No/mm)	伸长率 Elongation %	导体最大电阻 Max. Conductorresis tance (20℃) (Ω /km)	绝缘厚度 Thick (mm)	外径 Dia (mm)
绞合导体 Stranded Conductor	0.50	16/0.20	10	39	0.53	2.00±0.10
	0.75	24/0.20		26.5	0.55	2.30±0.10
	2x0.50	2x16/0.20		39	0.53	2x2.0±0.10
					0.75	5.50±0.20
	2x0.75	2x24/0.20		26.5	0.55	2x2.30±0.10
					0.75	6.10±0.20
	2x1.0	2x32/0.20		19.5	0.67	2x2.40±0.10
					0.95	6.70±0.20
	2x2.0	2x41/0.25		8.21	0.45	2x2.90±0.10
					0.85	7.50±0.20
					0.55	2x3.20±0.10
					0.70	7.80±0.20
	3x0.75	3x24/0.20		26.5	0.55	3x2.30±0.10
					0.97	6.90±0.20
3x1.50	3x48/0.20	13.3	0.58	2x2.80±0.10		
			1.10	8.20±0.20		